

MEMORY + INTERFACES SerDes PHYs Solution Overview



SerDes PHYs

Optimized for power and area, our lineup of SerDes Interface solutions deliver maximum performance and flexibility for today's most challenging systems.

Fully Standards-Compatible

- Faster time-to-market
- Multi-protocol support

Enhanced Design Flexibility

- Flexible packaging options
- Improved margin and yield

Reduced Power

......

- Wide range of PLL clock multipliers
- Fine-grain power -up/down options


SerDes PHYs

Overview

Our SerDes interfaces are high-quality, complete PHY solutions designed with a system-oriented approach to maximize flexibility and ease integration for our customers. Optimized for power and area at peak bandwidth, SerDes PHYs enable differentiation while maintaining compatibility with industry standards.

The SerDes interface family includes a range of solutions to meet a variety of speed and application requirements. The family of solutions includes:

- 56G Multi-protocol SerDes PHY
- 28G Multi-protocol SerDes PHY
- 16G Multi-protocol SerDes PHY
- 12G Multi-protocol SerDes PHY
- 6G Multi- protocol SerDes PHY

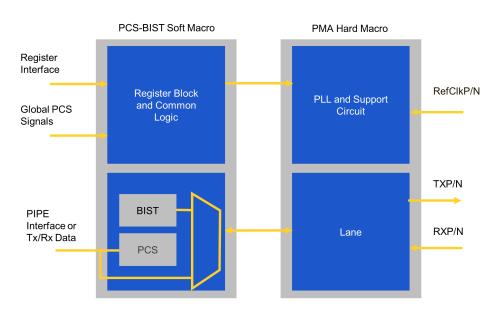

We offer complete PHY solutions – our SerDes PHY includes a Physical Media Attachment (PMA) hard macro and Physical Coding Sub-layer with Built-in Self-Test (PCS-BIST) soft macro. The PHYs can also be configured to multiple channel widths and packaging options, which simplifies integration and maximizes design flexibility.

Features

- Available in 14nm, 28nm, 40nm, and advanced FINFET nodes
- PMA hard macros optimized for multiple protocols including PCIe, SATA, SAS, 400G/CEI/ Interlaken, HMC, Fibre Channel and JESD204 interfaces
- Industry compliant PCS and MAC soft macros
- Support for x1, x2, x4 and x8 channel configurations
- Advanced Tx and Rx equalization
- Equalization adaptation
- BIST with PRBS generator and checker
- Data rate negotiation

Deliverables

PMA Hard Macro

- Verilog models
- LEF abstracts (.lef)
- Timing models (.lib)
- CDL netlists (.cdl)
- ATPG models
- IBIS-AMI models
- GDSII layout
- DRC & LVS reports
- PCS-BIST Soft Macro
- RTL model

Datasheet

SoC Integration guide Optional design integration and bring-up support services

rambus.com/serdes

© Rambus Inc. 1050 Enterprise Way, Suite 700 Sunnyvale, CA 94089 • rambus.com

